



G&G ARMAMENT
AIRSOFT GUNS & ACCESSORIES



Limited Edition

INSTRUCTION
MANUAL

COMPONENTS

WARNING !!

- Adult supervision required.
- Always wear safety goggles when using this product.
- Misuse or careless handling of this product may cause injury.
- May be hazardous up to 90 meters.
- This product is intended for users 18 years or older.
- Read all instructions before using this product.
- The buyer and the user of this product shall adhere to all local laws regulating the usage and the ownership of airsoft guns.



RECOMMENDED
BATTERY TYPE

G-11-019
NI-MH 9.6V 1400 mAh

WWW.GUAY2.COM Manufactured by G&G Armament Printed in Taiwan

FIRING MODE & SAFETY

CAUTION

1. Please select quality battery with the CE approval, to avoid any unnecessary damage on the product.
2. Please use either 8.4V or 9.6V battery, if different voltage used, it might damage the product.
3. Remove the battery from the product when it is not in use.
4. Do not wet nor incinerate the battery, nor to deform the terminal.



SAFETY ON
The trigger cannot be pulled



SEMI AUTO
Single shot




FULL AUTO
Automatic firing

BATTERY SETTING

FF15 BATTERY SETTING




1. Charge up the battery.
2. Charging will be completed after 3 hours.

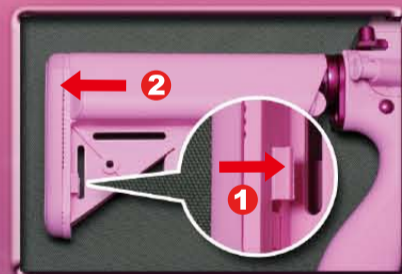

1. Push the butt plate lock (both sides)
2. Pull out the butt plate.



Take off the cover.

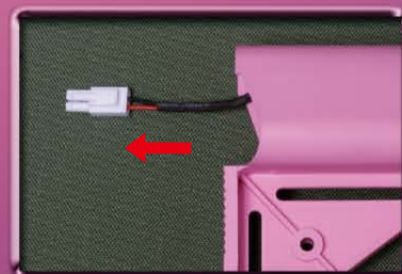

Pull out the wire connector.



Connect battery plug with the connector until you heard a click sound.



Insert the battery into stock.



Reinstall the battery cover and butt plate.

FF16 BATTERY SETTING



1. Pull the slip ring and hold.
2. Disassemble the lower handguard.



Connect battery plug with the connector.



1. Pull the slip ring and hold.
2. Reinstall the lower handguard.



Finish.

SETTING MAGAZINE

CAUTION

It is strongly recommended the use of G&G BB pellets only. Using low quality BB pellets will shorten product life span and void product warranty.



Open the cover of magazine.



Load G&G 5.95mm BB pellets into the magazine.



Close the cover plate then turn the gear until the sound changes.



Insert the magazine until you heard a click sound.

HOP-UP ADJUSTMENT

CAUTION

Do not catch your fingers in the dummy bolt. Never hold the gun sideways as the BB pellets will curve right or left.



Turn to Normal Turn to Hop

Too much Hop-up.
✗ (Turn the adjust lever toward Normal)

Best Position. ○

✗ Not enough Hop-up. (Turn the adjust lever toward Hop) or Too much Hop-up. (Turn the adjust lever toward Normal)





G&G ARMAMENT
AIRSOFT GUNS & ACCESSORIES



Limited Edition


INSTRUCTION MANUAL

WWW.GUAY2.COM

Manufactured by G&G Armament

Printed in Taiwan

FF15 RETRACTABLE STOCK MOVABLE PARTS

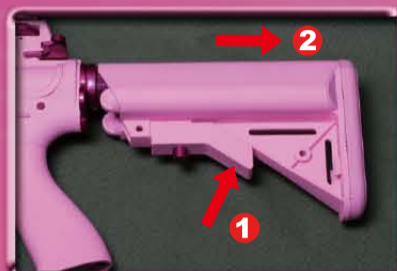

Press the stock release lever to unlock.




Adjust the position (6 position).



Detachable rear sight.



Turn the knobs counterclockwise to disassemble the rear sight.

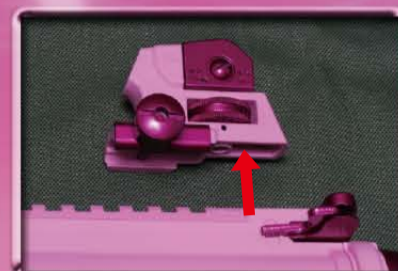


Take off the rear sight to install other accessories.



Remove the magazine.




Return the hop up dial to normal position and insert the cleaning rod from the lead edge of the inner barrel.

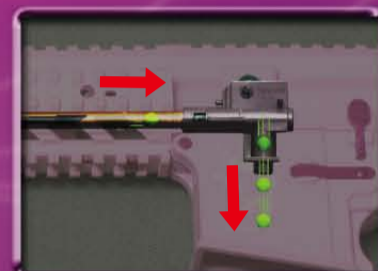

Be aware to have the rod facing down and reaching to the end, and remove clogged pellets.

FF16 RETRACTABLE STOCK MOVABLE PARTS

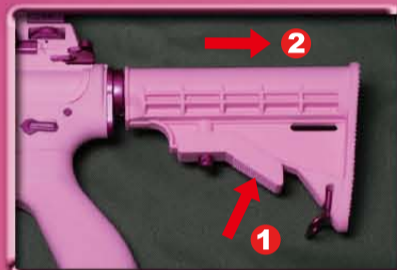

Press the stock release lever to unlock.



Adjust the position (6 position).



Detachable carrying handle.



Turn the knobs counterclockwise to disassemble the carrying handle.



Take off the carrying handle to install other accessories.



Adjust screw when the gear noise becomes shrilly.

The screw at bottom of the grip. Please use the screwdriver to adjust.



No operation

Check the wire set contact with motor.



No operation

Check the battery and connector.

REAR SIGHT ADJUSTMENT



WINDAGE KNOB (left / right adjustment)
ELEVATION KNOB (up / down adjustment)

CAUTION
Keep the selector on Safe mode until you are actually ready to shoot.

MAINTENANCE

TROUBLE SHOOTING

PARTS LIST

For **FF15 / FF16**

- | | |
|----------------------------------|---------------------------------|
| FF15-01 Flash hider set | FF15-17 Magazine catch set |
| FF15-02 Rail system set | FF15-18 Selector lever set |
| FF15-03 Rear sight base set | FF15-19 Stock washer |
| FF15-04 Rear sight set | FF15-20 Enhanced rod set |
| FF15-05 Front barrel set | FF15-21 Hi-cap 450r magazine |
| FF15-07 Barrel base set | FF15-22 Lower receiver set |
| FF15-08 Piston rod | FF15-23 Trigger guard set |
| FF15-09 Assist knob set | FF15-24 Selector plate |
| FF15-10 Inner barrel | FF15-25 Rear frame lock pin set |
| FF15-11 Upper receiver set | FF15-26 Grip |
| FF15-12 Charging handle set | FF15-27 Motor set |
| FF15-13 Hop up set | FF15-28 Grip bottom set |
| FF15-14 Port cover set | FF15-29 Extended stock set |
| FF15-15 Front frame lock pin set | FF15-30 Rear wire set |
| FF15-16 Bolt catch set | |

For **FF16**

- | | |
|-------------------------------|--------------------------------|
| FF16-06 Outer barrel set | FF16-34 Front outer barrel set |
| FF16-31 Gear box set | FF16-35 Handguard set |
| FF16-32 Carrying handle set | FF16-36 Retractable stock set |
| FF16-33 Rear outer barrel set | |

ADDRESS 1F,NO.552,Hegang Rd.,Hemei Township,Changhua County 50844,TAIWAN


TEL 886-4-757-7000

FAX 886-4-757-8000

WEBSITE <http://www.guay2.com>

E-MAIL Sales Department : sales@guay2.com
b2b@guay2.com

Technology support Department : support@guay2.com



Please consult your dealer or G&G for overhaul maintenance and technical guidance.

▶ You may purchase all of the groups' parts from G&G support Dep.

▶ E-Mail: support@guay2.com

